

Industrial control transformer, Type TF, 1 phase, 500VA, 208/230/460V primary, 115V secondary, 50/60Hz

9070TF500D20

Product availability: Stock - Normally stocked in distribution

facility

Price*: 882.00 USD

Main

Product or Component Type	Industrial Control Transformer
Туре	TF

Complementary

Number of Phases	1 phase	
Power Rating	500 VA UL 500 VA CSA 500 VA NOM 300 VA CE	
Primary to Secondary Voltage	208/230/460 V 115 V	
Fuse type	0.41 x 1.50 in CC top	
Temperature rise	115 °C	
Electrical Connection	Screw clamp terminals	
Height	5.8 in (147.32 mm)	
Width	5.25 in (133.35 mm)	
Depth	5.61 in (142.49 mm)	
Material	Copper winding	
Fingersafe Cover Compatibility	FSC2	

Environment

Product Certifications	UL listed file E61239 CSA file LR37055 guide 184-N-90
Enclosure Type	Not rated (open device)
Insulation temperature	356 °F (180 °C)

Ordering and shipping details

Category	16203-9070 TF (NOT T) 250-1000VA
Discount Schedule	CP8
GTIN	785901905295
Returnability	Yes
Country of origin	MX

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.00 in (17.78 cm)
Package 1 Width	8.20 in (20.828 cm)
Package 1 Length	8.60 in (21.844 cm)
Package 1 Weight	18.50 lb(US) (8.392 kg)


Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
PVC free	Yes

Contractual warranty

Warranty 18 months

Dimensions

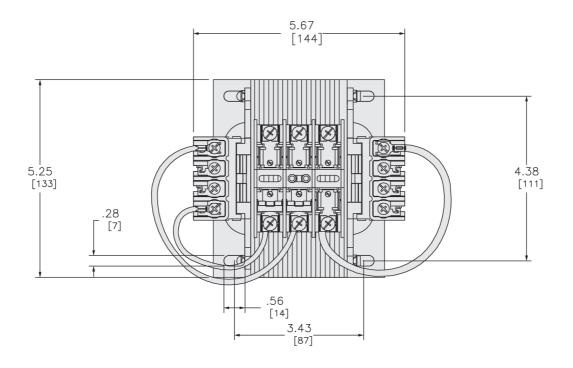

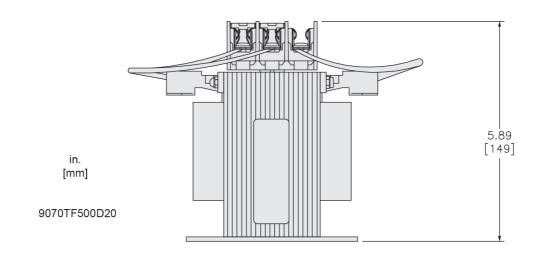

Recommended replacement(s)